


Thomson

CHEMLON® 7500

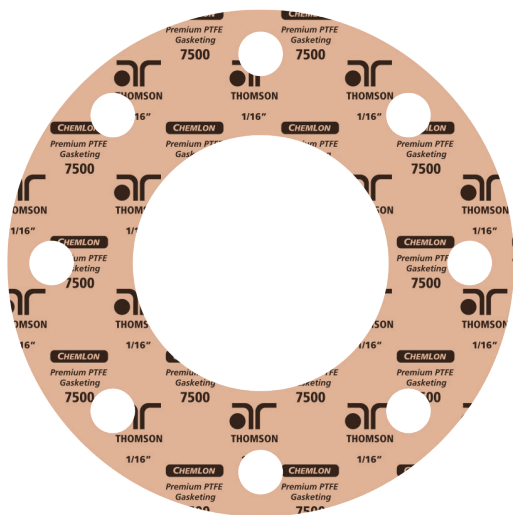

Genuine Teflon® filled with silica for superior creep and cold flow resistance. Excellent resistance to strong acids and hydrocarbons.

FEATURES / BENEFITS

- Premium, genuine Teflon® ensures reliability, consistency and performance.
- Improved performance over conventional PTFE.
- Reduced cold flow and creep relaxation.
- Lays flat allowing easier cutting and handling.
- Excellent resistance to sulfuric acids.
- FDA Compliant: complies with FDA regulation 21CFR177.1550.

TYPICAL APPLICATIONS

- Mining (sulfuric acid leaching process and PAL - pressure acid leaching).
- Strong acids (except for hydrofluoric acid).
- Cryogenics, hydrocarbons, water and saturated steam - less than 100 psi (7 bar), 338°F (170°C).

SPECIFICATIONS

Construction:

Genuine Teflon® / Silica

Colour:

Fawn with Black branding.

Temperatures:

-450°F (-268°C) to
+500°F (+260°C)

Pressure:

Max: 1200 psi (83 bar)

Tensile Strength: 2030 psi

* See reverse for additional technical data.

* For Oxygen O2 applications special order refer to as 7502 O2 cleaned bagged & tagged individually.

* Product will be unbranded for O2 cleaning purposes.

Teflon® is a registered trademark of Dupont. (Chemours formerly Dupont)
All trademarks remain property of their respective holders and are used only to directly describe the products being provided.

TECHNICAL DATA - CHEMLON® 7500

Physical Properties

TEST METHOD	TYPICAL PHYSICAL PROPERTIES	
ASTM F36 M	Compressibility: range, %	7–12
ASTM F36 M	Recovery: %	40
ASTM F38	Creep relaxation: %	18
ASTM F152	Tensile strength: psi (N/mm ²)	2030 (14)
ASTM F586	Design factors:	1/16" 1/8"
	“m” factor	4.4 3.5
	“y” factor: psi	2500 2000

Sealing Characteristics

	ASTM F37 A	DIN 3535 (1/16" SHEET)
Sealability:	.20 ml/h	<.015 cm ³ /min

NOTES

ASTM properties based on 1/32" in. (0.8 mm) sheet thickness unless otherwise noted. This is a general guide and should not be the sole means of selecting or rejecting this material. Based on ANSI RF flanges at our preferred torque - when approaching maximum pressure, continuous operating temperature, minimum temperature or 50% of maximum P×T, consult A.R. Thomson Group. The data listed here falls within the normal range of product properties but should not be used to establish specification limits nor used alone as the basis of design.

AUTHORIZED DISTRIBUTOR



Limitation of liability: actual performance may vary and is determined by factors unique to a given application. It is recommended that care be taken in the selection and application of materials for hazardous services and controlled testing be undertaken to determine suitability for a specific application. A.R. Thomson Group does not make or imply any warranty of suitability for a particular purpose and is not liable for any damages arising from the use of the information in this sheet.

A.R. THOMSON GROUP INC.

Locations across Canada to serve you. For your nearest branch, please visit: www.arthomson.com

Copyright © A.R. Thomson Group - All rights reserved.